


GRUINSA


GRUAS

55t

LIEBHERR LTM1055-3.2

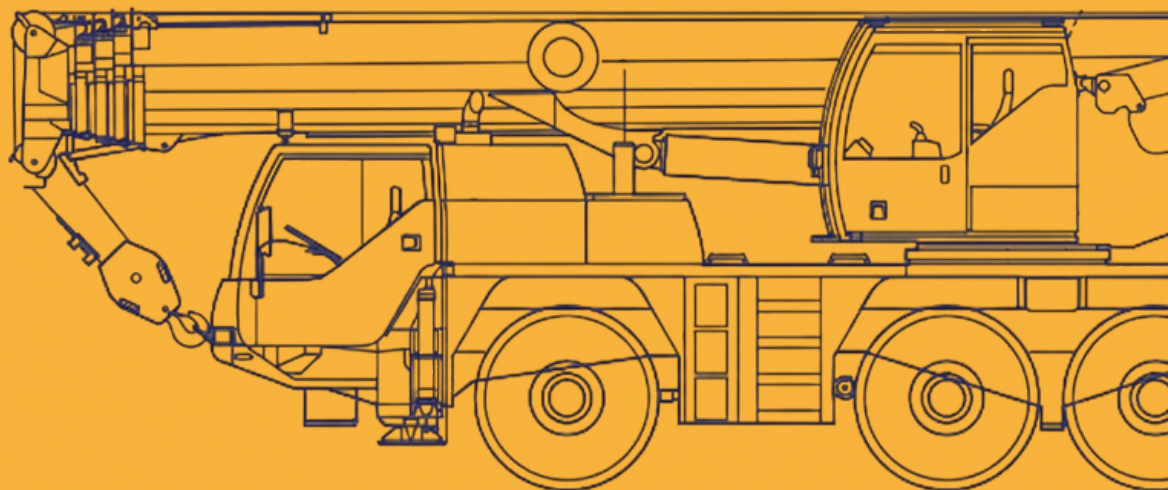

DIMENSIONES / DIMENSIONS

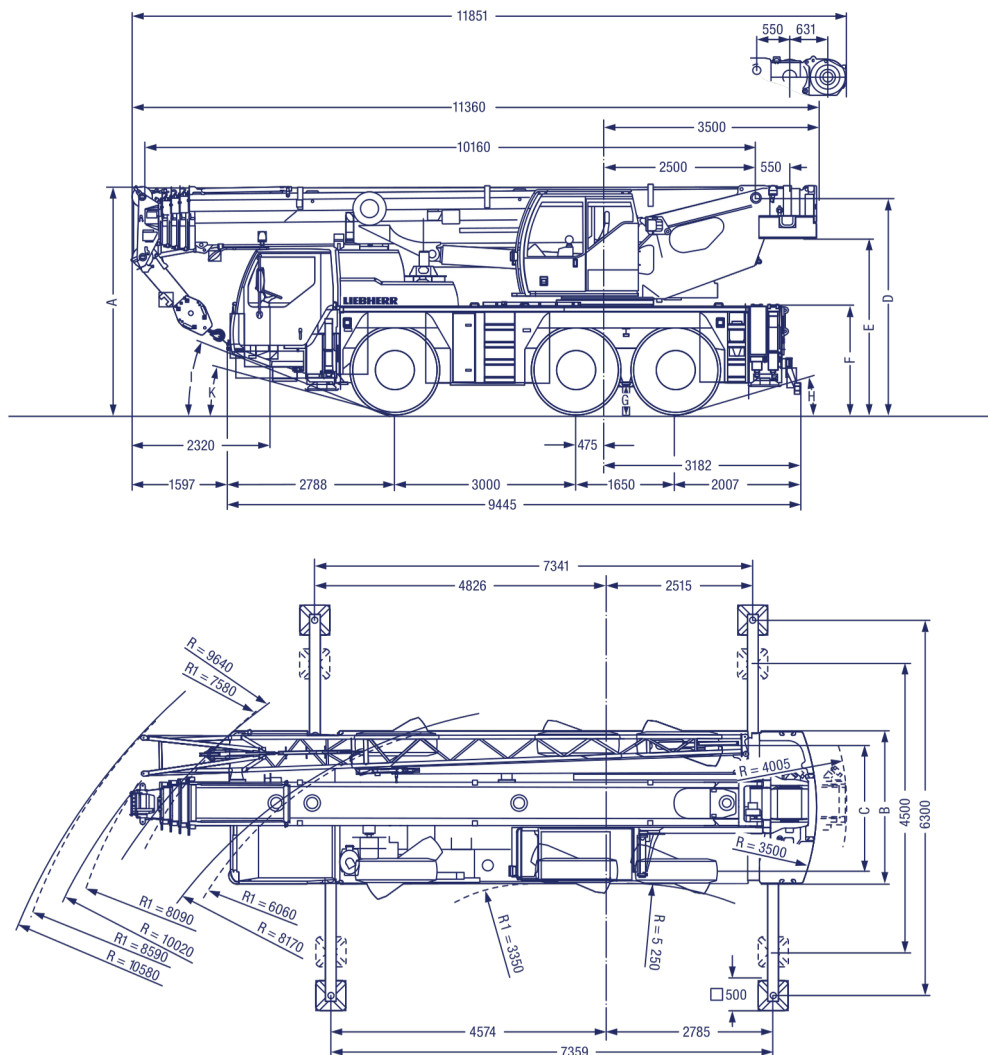**DIMENSIONES mm. / DIMENSIONS mm.**

	A	A 100 mm	B	C	D	E	F	G	H	I	K
14.00 R 25	3700	3600	2540	2113	3498	2830	1710	375	11°	18°	13°
16.00 R 25	3750	3650	2540	2101	3548	2880	1760	425	12°	20°	15°
20.50 R 25	3750	3650	2680	2163	3548	2880	1760	425	12°	20°	15°

R= Dirección en todos los ejes / *All-wheel steering*

(*) suspensión abajo / *lowered*

LIEBHERR LTM 1055 - 3.2

CAPACIDADES DE CARGA CON PLUMA PRINCIPAL / LIFTING CAPACITIES WITH MAIN BOOM

55t


12 t 	10,2 m - 40 m					360°	DIN / ISO			
Radio Radius m	Pluma principal / Main Boom									
	10,2 t	13,6 t	17 t	20,5 t	23,9 t	27,3 t	30,7 t	34,2 t	37,6 t	40 t
2,5	55,0									
2,7	53,4									
3	50,7	42,3	42,3	42,2	38,2	30,6	22,8			
3,5	47,0	42,3	42,2	42,1	37,8	30,9	23,2			
4	43,6	40,9	40,9	39,1	37,0	31,0	23,6	18,8		
4,5	40,3	37,5	37,5	36,1	34,0	30,7	23,8	19,1	14,7	
5	36,9	34,5	34,5	33,5	31,6	30,2	23,6	19,1	14,9	
6	31,7	28,9	29,1	29,2	28,7	27,3	22,0	18,4	15,0	11,8
7	26,0	24,2	24,5	24,6	24,9	23,4	20,2	17,1	14,4	11,7
8			21,0	21,2	21,0	19,7	18,4	16,0	13,8	11,3
9			17,5	17,9	17,8	17,0	16,1	14,9	13,0	10,8
10			14,8	15,2	15,1	14,8	14,4	13,6	12,3	10,3
12				11,4	11,4	11,6	11,5	10,9	10,6	9,4
14				9,1	9,1	9,3	9,1	9,0	8,7	8,5
16					7,7	7,6	7,4	7,5	7,5	7,3
18						6,4	6,5	6,3	6,3	6,0
20						5,4	5,5	5,4	5,3	5,1
22							4,7	4,6	4,5	4,3
24							4,1	3,9	3,9	3,6
26								3,4	3,3	3,1
28								3,0	2,9	2,7
30									2,5	2,3
32										2,0
34										1,7
36										1,4

(*) hacia atrás / over reach

LIEBHERR LTM 1055 - 3.2

DIAGRAMA DE ALCANCE / WORKING RANGES

55t

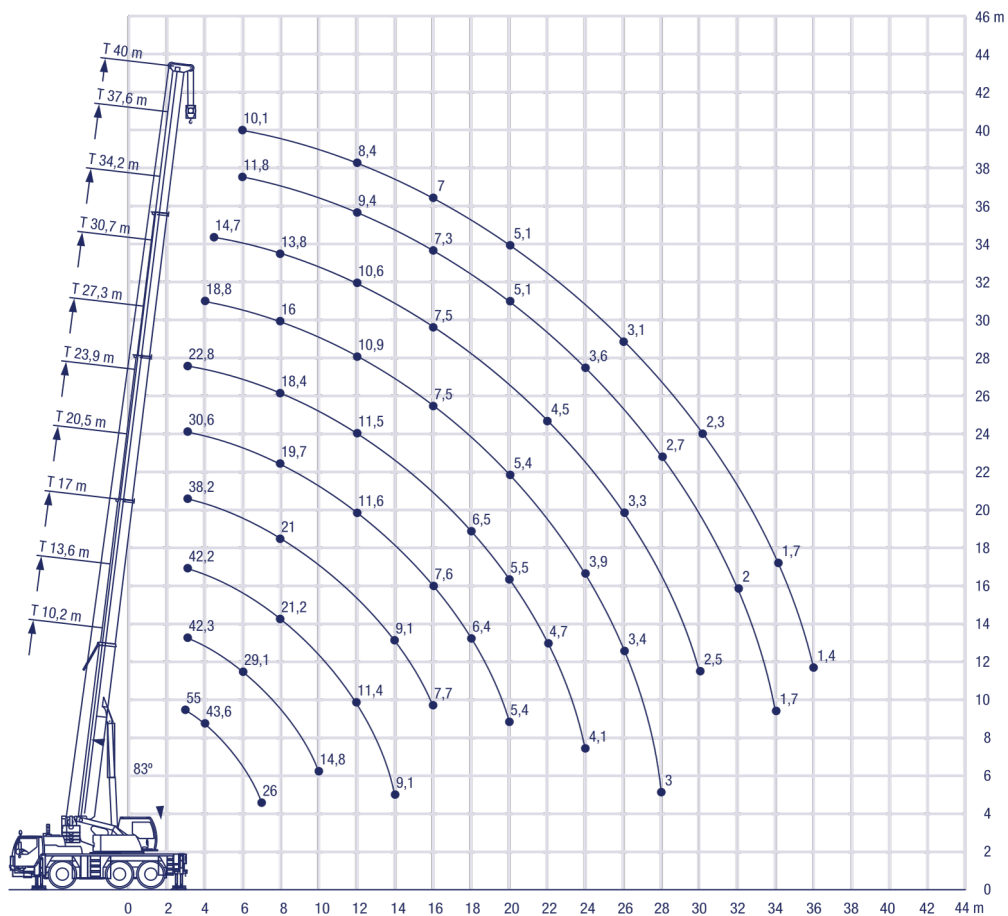

LIEBHERR LTM 1055 - 3.2

DIAGRAMA DE ALCANCE / WORKING RANGES

55t

